

# HSF

### NOTES:


Current Rating: 2.0AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 500V AC/DC  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
Contact plating: Au over Ni  
Insulator Material: PA9T+30%G.F. UL94V-0

## Ordering Information

### 2221-2 XX M XX CUN T X

No. of Pins per Row: 02-40Pin  
Contact Plating: G0=Gold Flash, G3=10µ"Gold, G4=15µ"Gold, G5=30µ"Gold  
Packing: T=Tube, P=Tube+CAP, R=Tube&Reel+CAP  
Series No. 1=Type 1, 2=Type 2

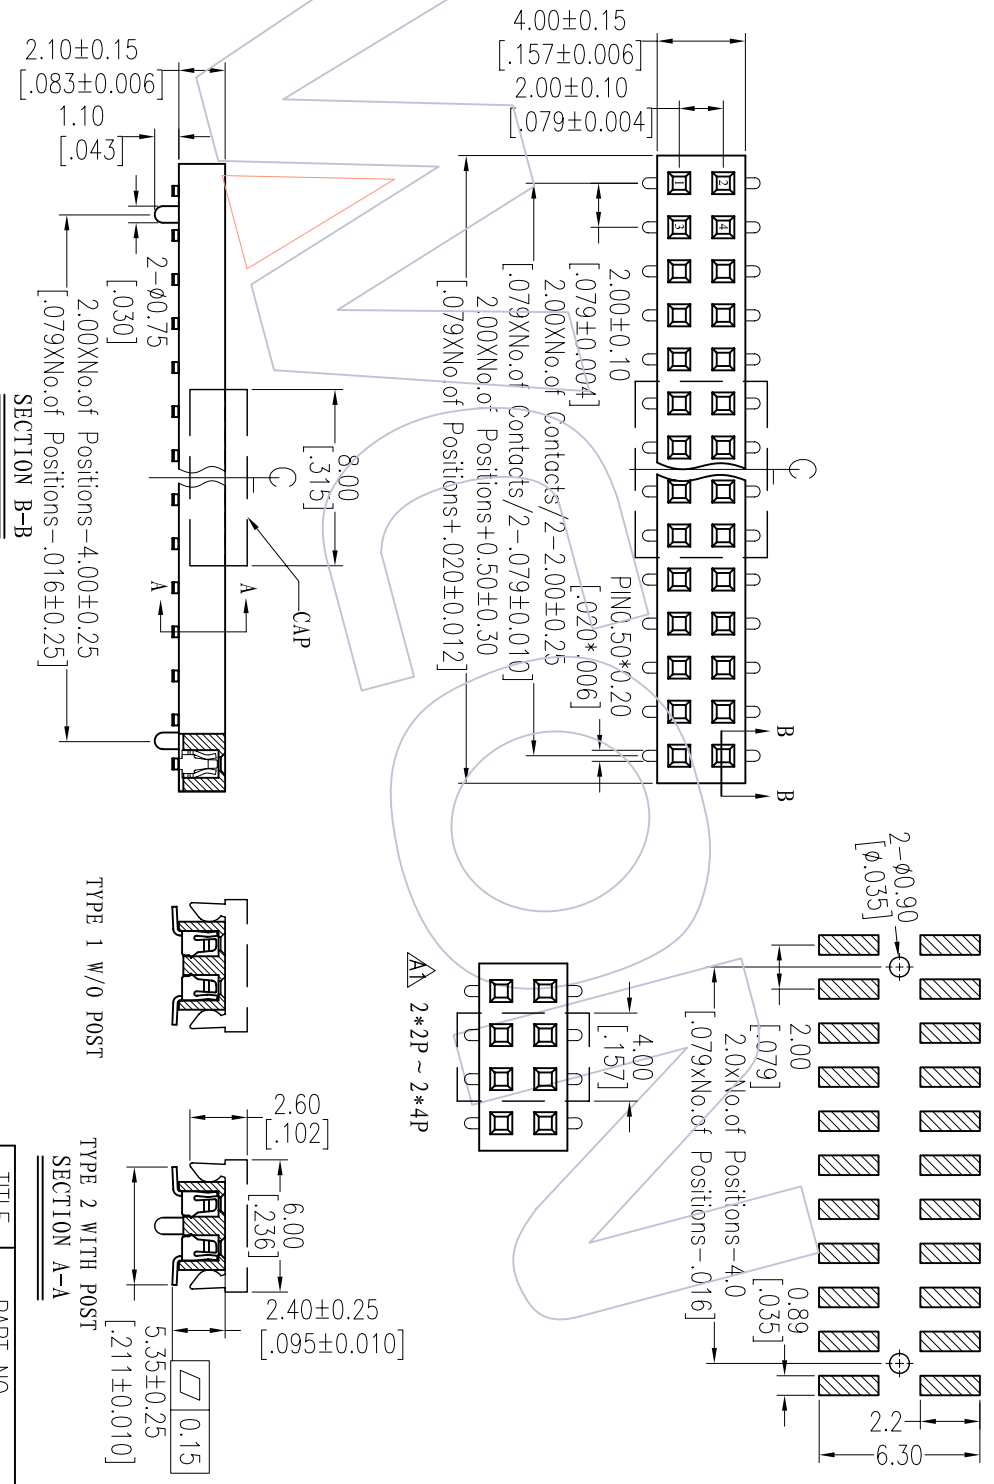

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A1	2012/10/29	Modify drawing
A0	2012/07/12	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	Wang	2012/10/29		mm	SBE TABLE
XX	CHECK	DATE	UNIT	A4	TITLE: FH2. 00mm Dual ROW 180° SMT H=2.1 W=5.35
XX	APPROVE	DATE	SHEET	1/1	Customer NO.
ANGLE	± 3°		PROJ.		
DIW	TOL				

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

TITLE	PART NO.
TYPE 1	2221-2XXMXXCUNT1
TYPE 2	2221-2XXMXXCUNT2