

HSF

NOTES:

Current Rating:1.5AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%GF(UL94V-0)


Ordering Information

3111-XX S XX B D00 X X

No. of Pins	Contact Plating	Color Insulator	Packing
10 30	G0=Gold Flash	B=Black	T=Tube
14 34	G3=10u"Gold		
16 40	G4=15u"Gold		
20 44	G5=30u"Gold		
24 50	S0=Gold Flash/Tin		
26 60	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

Item	A	C	H	Mating
Standard	2.80		1.50 2.00	5222 5224 5225
Alternate				

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

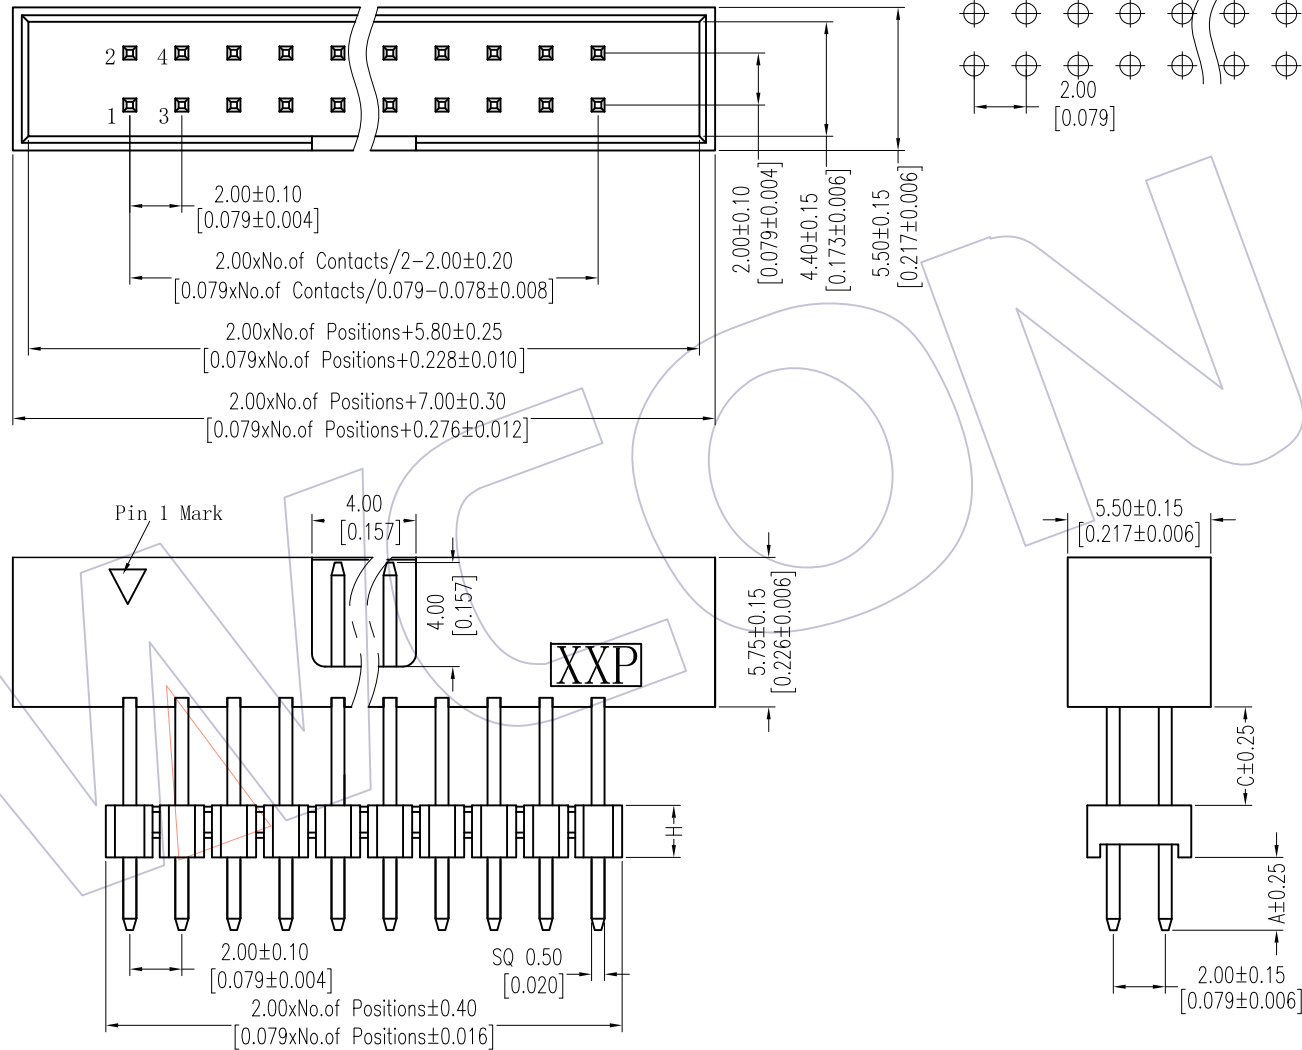

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		DATE		SCALE	FIT	PART NO.
				Angle	DIM	TOL	±	DingWenMin	DATE			
A1	2016/11/29	增加塑胶高度规格	△	X.X	±0.40	CHECK	DATE	2016/11/29		mm	A4	3111-XXSXXBD00XX
A0	2012/05/31	NEW	—	X.XX	±0.25	APPROVE	DATE			inch	1/1	TITLE: 2.0 BOX HEADER 180° H=5.7 ADD HOUSING
				X.XXX	±0.15							Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--