

# HSE


**NOTES:**

- Rated Current: 12.0 AMP
- Contact Resistance: 20 mΩ Max
- Withstand Voltage: 2000 V AC/DC
- Insulation Resistance: 1000 MΩ min
- Operation Temperature: -40°C to +105°C
- Wire Range: 24~12 AWG
- Wire Strip Length: 11~12mm
- No. of Positions: 2~24
- Terminal Material: Phosphor Bronze
- Terminal Plating: Matte Tin Plated Over Nickel
- Spring Blade Material: Stainless Steel
- Up Cover Material: (High Temp.)Thermoplastic: UL94 V-0
- Below Cover Material: (High Temp.)Thermoplastic: UL94 V-0
- Right Auricular Fastener Material: (High Temp.)Thermoplastic: UL94 V-0
- Left Auricular Fastener Material: (High Temp.)Thermoplastic: UL94 V-0
- Push Pole Material: (High Temp.)Thermoplastic: UL94 V-0

**Ordering Information:**

P F 508 S-2 F XX A SM S 1 N

F=Female Pitch No. of Pins Color Contact Plated Type  
 508=508 02-24P A=Green SW=Matte Tin N=Without Screw  
 S=With Latch

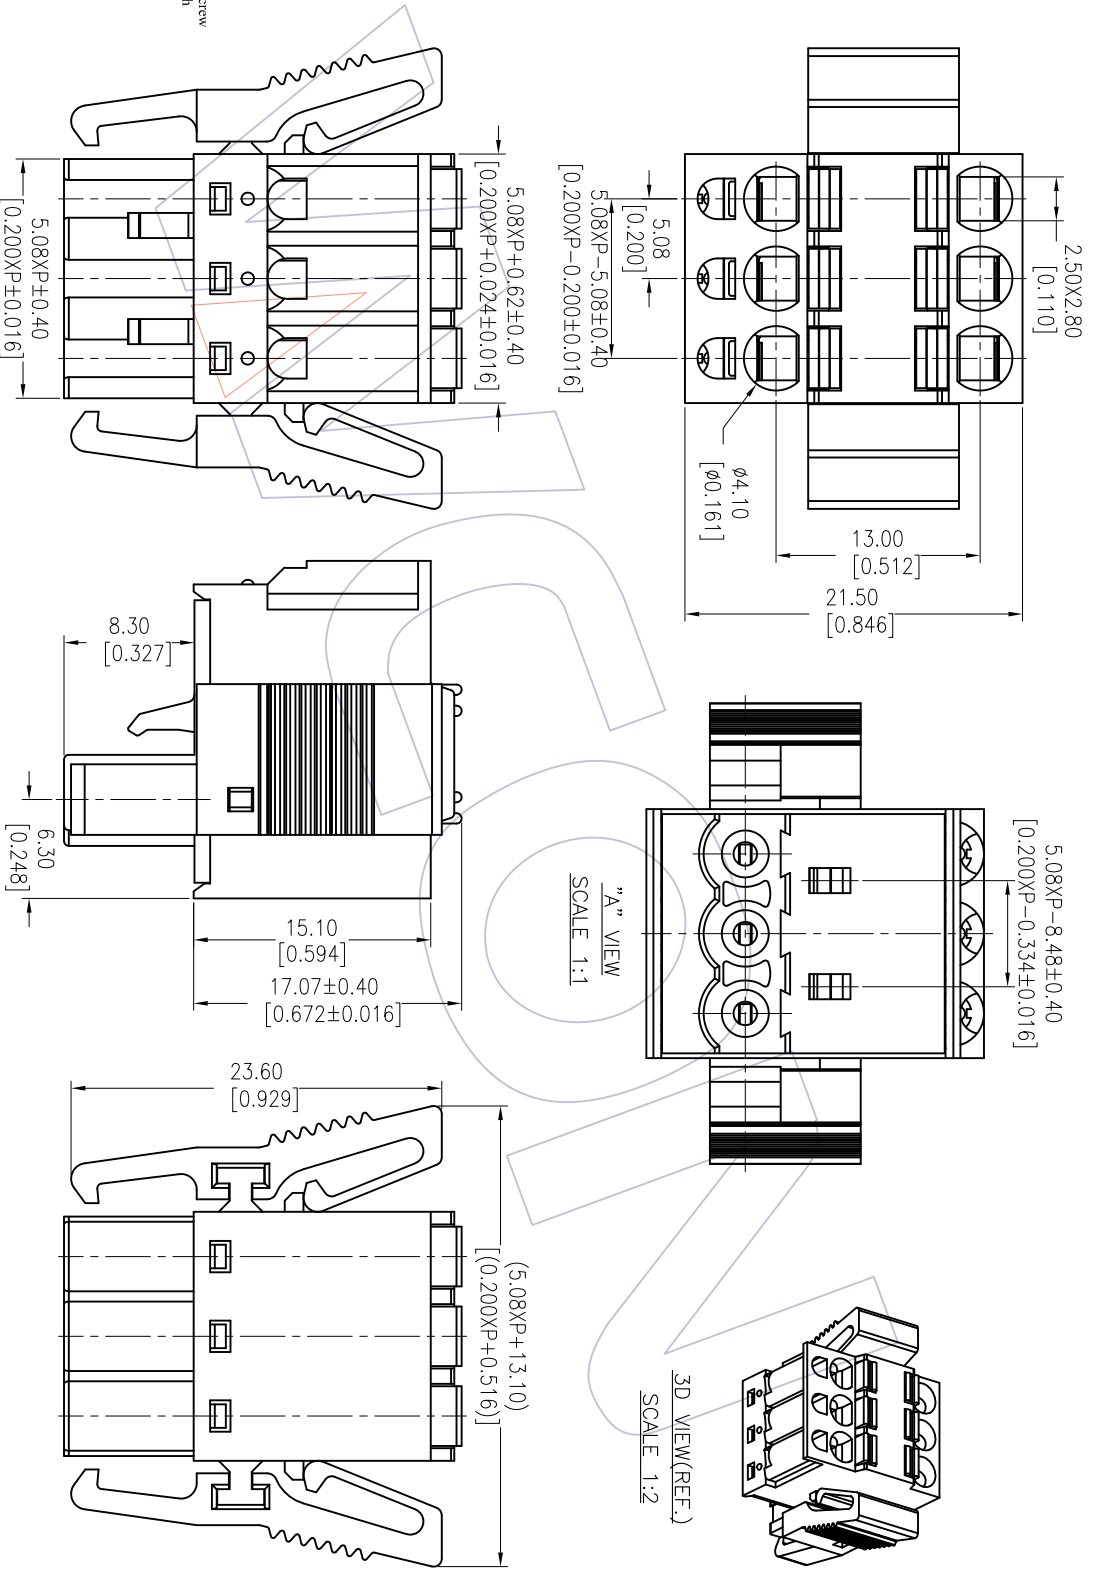

"A" VIEW

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
						XX	TsingSn	2012/10/06	mm	A4				
A0	2012/10/06	NEW		Angle	± 3'	CHECK	APPROVE	DATE	SHEET	1/1	Customer NO.		Tel: +86 769 85358920	Tel: +86 512 57468408
													Fax: +86 769 85358915	Fax: +86 512 57468468
													E-mail: sales@wcon.com	E-mail: sales@wcon.com

## WCON

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com